

# SyAM Software™


## Remotely Changing the System Area Manager IP Address on a group of System Clients using the Management Utility

If for some reason you have had to change the IP Address of the System Area Manager that all of the Clients are reporting to, and that prior IP Address of the System Area Manager is not available you can use the following to move the IP Address of the System Area Manager that the System Clients are reporting to.

Store the batch file and ntarg.dat files in the \syam\utilities\apps folder


Edit the NTARG.DAT file with the IP Address of the System Area Manager you wish the System Client now to Report to  
Example 192.168.50.10

***\*Do not insert extra line as it will corrupt the file***

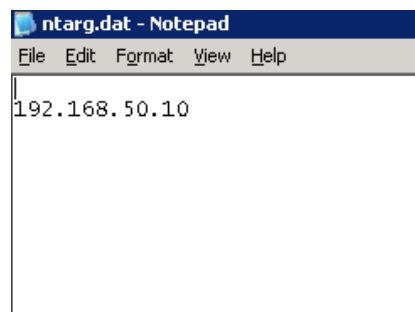

```
ntarg.dat - Notepad
File Edit Format View Help
192.168.50.10
```

Create a batch file that will be copied over to the systems that are running the System Client.  
It will stop the agent service, copy the new NTARG.DAT file and then start the agent service

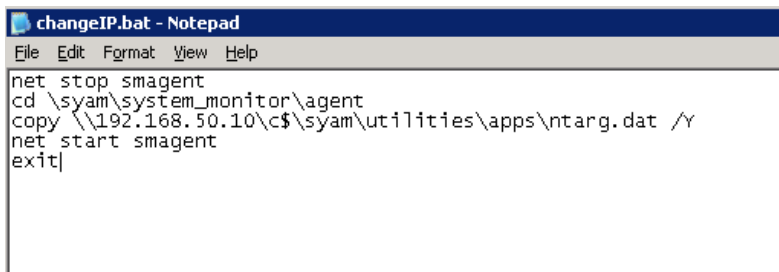


```
changeIP.bat - Notepad
File Edit Format View Help
net stop smagent
cd \syam\system_monitor\agent
copy \\192.168.50.10\c$\syam\utilities\apps\ntarg.dat /Y
net start smagent
exit
```


SyAM Software:Remotely Changing the System Area Manager IP Address on a group of System Clients using the Management Utility

Within the Management Utility under Third Party Installation add the batch file and check the **Copy this file option**

example changelP.bat

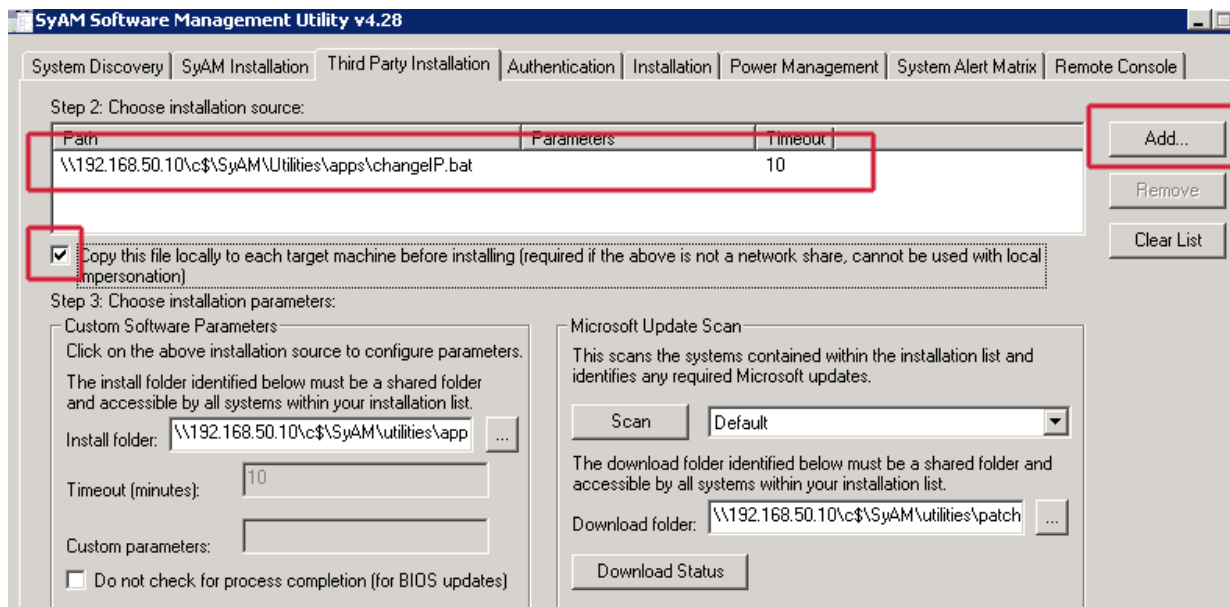


Under Authentication configure the administartor level username and password that will be used to perform this function on the remote systems

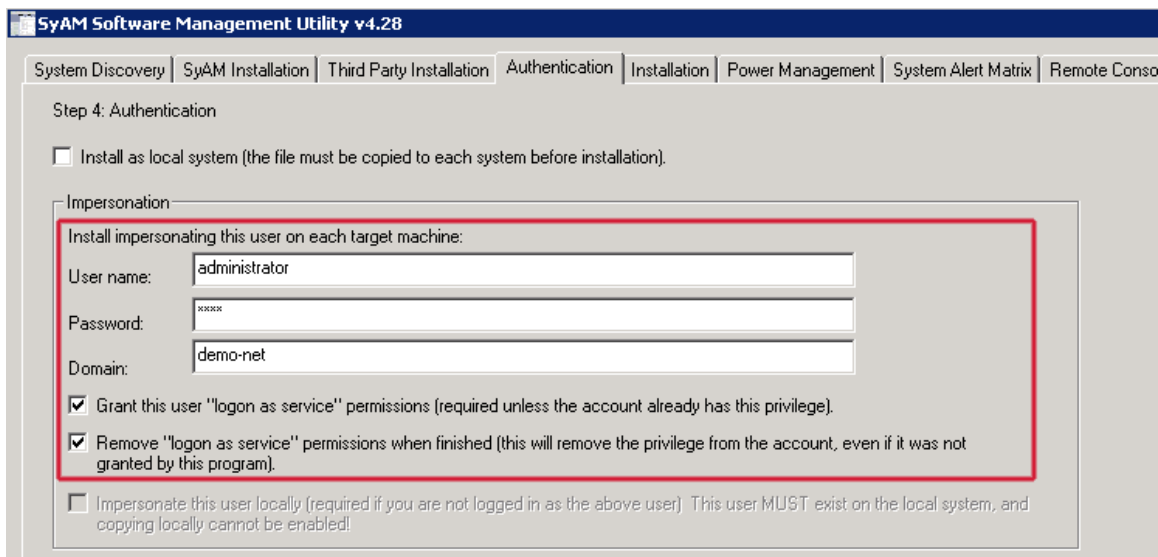

SyAM Software:Remotely Changing the System Area Manager IP Address on a group of System Clients using the Management Utility

Under Installation choose the group of systems you wish to perform this remote change to, then click on the Install Third Party button to install the changes.

Once completed it will show installation history

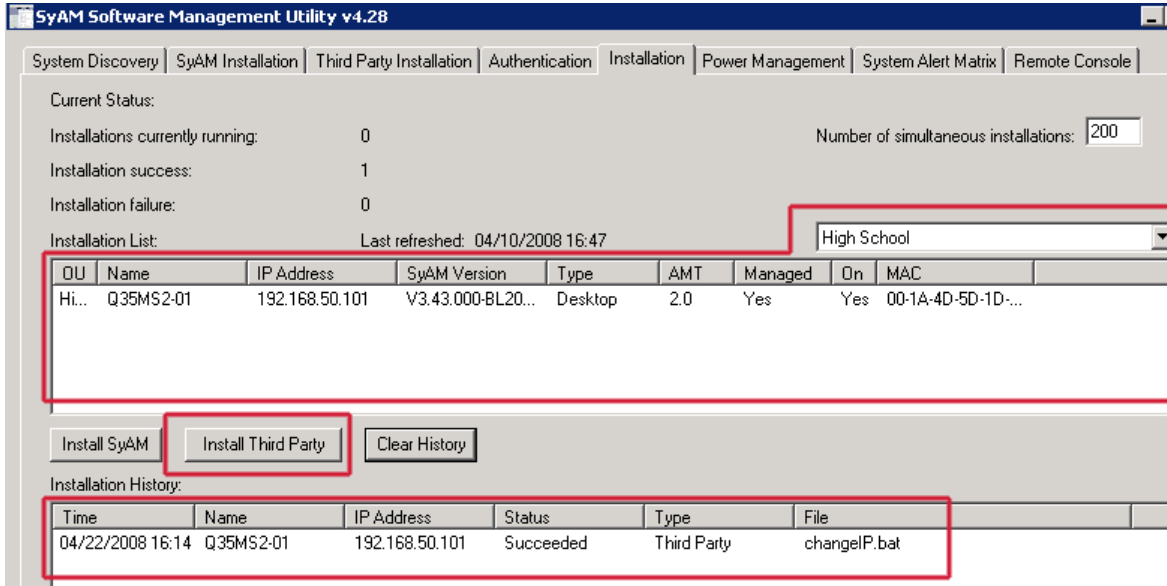

System Client – IP Address of the System Area Manager before

**Notification Settings**

**Email Address**   
**SMS/Pager Address**   
**Network Message Machine Name**   
**System Area Manager**   
**Username**   
**Sender's Email Address**   
**Sender's Email Password**

System Client – IP Address of the System Area Manager after

**Notification Settings**

**Email Address**   
**SMS/Pager Address**   
**Network Message Machine Name**   
**System Area Manager**   
**Username**   
**Sender's Email Address**   
**Sender's Email Password**

## Contact SyAM Software

For additional information, sales, or technical support, contact SyAM Software:

### **SyAM Software, Inc.**

#### **Corporate Headquarters**

1 Chestnut Street, Suite 3-I  
Nashua, NH 03060  
PH +1 603 598-9575  
FX +1 603 598-9577  
[info@syamssoftware.com](mailto:info@syamssoftware.com)

### **888 UnifyMe (864-3963)**

#### **Sales Offices**

US Sales 781 718-7395  
South America +55 11 3641-3580  
Europe +49 8158 905933

[www.syamssoftware.com](http://www.syamssoftware.com)